

## Low profile in-line fasteners

This Safe-Ty™ design from Thomas & Betts is ideal for use where precision bundling is required and clearance is a necessity. A unique saddle back design curves to form a snug fit around the bundle, and allows for easy pull-through in bulkheads and any other tight spaces.


### Features

- Low-profile, contoured head reduces clearance required for the bundle and enhances the appearance of your harness
- The safe-guard wall eliminates exposure to sharp edges
- The saddle back fits snug against the contour of the wiring harness
- Sizes and colours available to accommodate various requirements
- Recommended in all applications where the aesthetics and the user's safety can be a concern (thanks to the rounded edges): playgrounds, supermarket displays,...



### Technical Information

Material	Polyamide 6.6
Temperature range	-40°C to +85°C
Colour	Natural or UV-resistant (see table)
Flammability rating	UL 94 V-2
Other properties	UV-resistant (black), Halogen free Silicone free

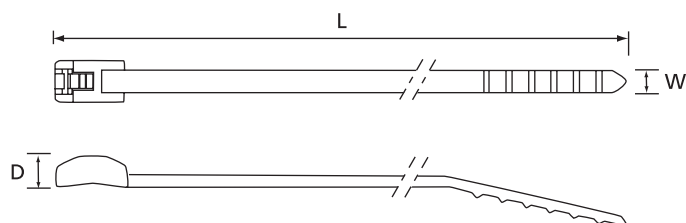

### Ordering Information

PRODUCT REF.	COLOUR	LENGTH	WIDTH	D	BUNDLE DIAMETER	MINIMUM	QUANTITY **	TOOLING
		L	W		MIN. - MAX.	TENSILE STRENGTH		
		[mm]	[mm]	[mm]	[mm]	[N]	[pieces]	
SF100-18	natural*	118	2.4	3.2	3.2 - 25.4	80	100 / 1000	
SF100-18X	UV-resistant black	118	2.4	3.2	3.2 - 25.4	80	100 / 1000	ERG299
SF200-18	natural*	206	2.4	3.2	3.2 - 50.8	80	100 / 1000	WT193A
SF200-18X	UV-resistant black	206	2.4	3.2	3.2 - 50.8	80	100 / 1000	TR227
SF175-50	natural*	201	4.7	4.5	4.7 - 44.5	220	100 / 1000	
SF175-50X	UV-resistant black	201	4.7	4.5	4.7 - 44.5	220	100 / 1000	ERG297
SF300-50	natural*	288	4.7	4.5	4.7 - 76.2	220	100 / 1000	ERG299
SF300-50X	UV-resistant black	288	4.7	4.5	4.7 - 76.2	220	100 / 1000	WT193A
SF400-50	natural*	369	4.7	4.5	9.5 - 101.6	220	100 / 1000	TR227
SF400-50X	UV-resistant black	369	4.7	4.5	9.5 - 101.6	220	100 / 1000	L-500-EU
SF400-120	natural*	370	7.6	6.9	9.5 - 101.6	540	100 / 1000	
SF400-120X	UV-resistant black	370	7.6	6.9	9.5 - 101.6	540	100 / 1000	ERG297
SF600-120	natural*	533	7.6	6.9	9.5 - 152.4	540	100 / 1000	L-500-EU
SF600-120X	UV-resistant black	533	7.6	6.9	9.5 - 152.4	540	100 / 1000	WT3D

\* For other colours add colour suffix to Product Reference: 0 = black, 1 = brown, 2 = red, 3 = orange, 4 = yellow, 5 = green, 6 = blue, 8 = grey and 9 = white. For example: SF-175-50-2 (red)

\*\* Standard quantity = 1000. For bags of 100 add -100 to the product reference, for example. SF100-18-100.

For tooling specifications see pages 92 to 99